


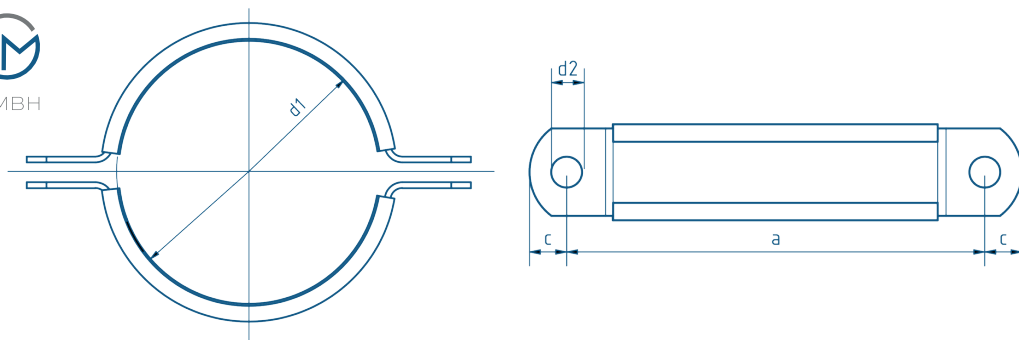

ROHRSCHELLE LEICHTE BAUREIHE MIT SPANNBEREICH UND GUMMEINLAGE

SPANNBEREICH	a	c	d2	f	FLACHSTAHL	SCHRAUBEN
14 - 18 mm	44	9	9	7	30 x 3 mm	M8 x 25
19 - 23 mm	54					
24 - 28 mm	58					
29 - 33 mm	66					
33 - 37 mm	69					
40 - 45 mm	80					
47 - 52 mm	84					
53 - 58 mm	89					
60 - 65 mm	98					
67 - 72 mm	116	13	11	9	30 x 3 mm	M10 x 30
73 - 78 mm	123					
79 - 85 mm	125					
86 - 90 mm	136					
94 - 100 mm	146					
100 - 106 mm	148					
108 - 115 mm	155					
116 - 124 mm	162					
124 - 129 mm	180	16	14	13	40 x 3 mm	M12 x 35
131 - 137 mm	189					
138 - 144 mm	193					
148 - 154 mm	204					
156 - 162 mm	210					
165 - 171 mm	225					
177 - 183 mm	239					
188 - 194 mm	247					
199 - 208 mm	274	18	18	14	40 x 4 mm	M16 x 45
219 - 225 mm	291					
236 - 242 mm	308					
260 - 266 mm	332					
271-277 mm	343					
301 - 307 mm	373					
311 - 318 mm	384					
322-329 mm	395					
354-358 mm	424					
402-408 mm	474					
506-510 mm	576					

Bis Spannbereich 116 - 124 mm gestrahlt; Ab Spannbereich 124 - 129 mm gebeizt und passiviert