
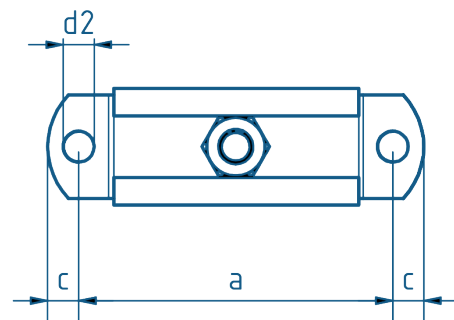


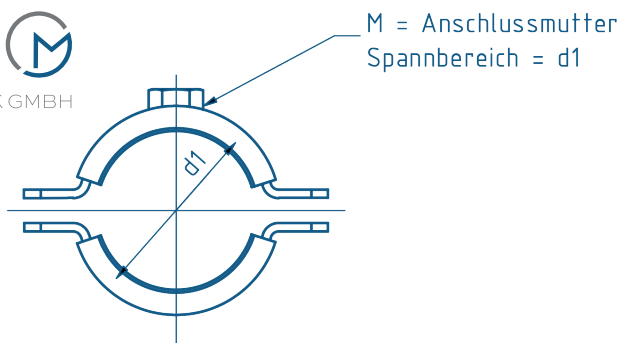

ROHRSCHELLE MIT ANSCHLUSSMUTTER UND GUMMIEINLAGE

SPANNBEREICH	M	a	c	d2	f	FLACHSTAHL	SCHRAUBEN
14 - 18 mm	8	44	9	9	7	30 x 3 mm	M8 x 25
19 - 23 mm	8	54					
24 - 28 mm	8	58					
29 - 33 mm	10	67					
33 - 37 mm	10	69					
40 - 45 mm	10	80					
47 - 52 mm	10	84					
53 - 58 mm	10	89					
60 - 65 mm	10	98					
67 - 72 mm	12	114	13	11	9	30 x 3 mm	M10 x 30
73 - 78 mm	12	121					
79 - 85 mm	12	123					
86 - 90 mm	12	134					
94 - 100 mm	12	144					
100 - 106 mm	12	146					
108 - 115 mm	12	153					
116 - 124 mm	12	154					
Bis Spannbereich 116 - 124 mm gestrahlt; Ab Spannbereich 124 - 129 mm gebeizt und passiviert							
124 - 129 mm	16	180	16	14	13	40 x 3 mm	M12 x 35
131 - 137 mm	16	189					
138 - 144 mm	16	193					
148 - 154 mm	16	204					
156 - 162 mm	16	210					
165 - 171 mm	16	225					
177 - 183 mm	16	239					
188 - 194 mm	16	247					
199 - 208 mm	16	274	18	18	14	40 x 4 mm	M16 x 45
219 - 225 mm	16	291					
236 - 242 mm	16	308					
260 - 266 mm	16	332					
271-277 mm	16	343					
301 - 307 mm	16	373					
311 - 318 mm	16	384					
322-329 mm	16	395					
354-358 mm	16	424					
402-408 mm	16	474					
506-510 mm	16	576					