


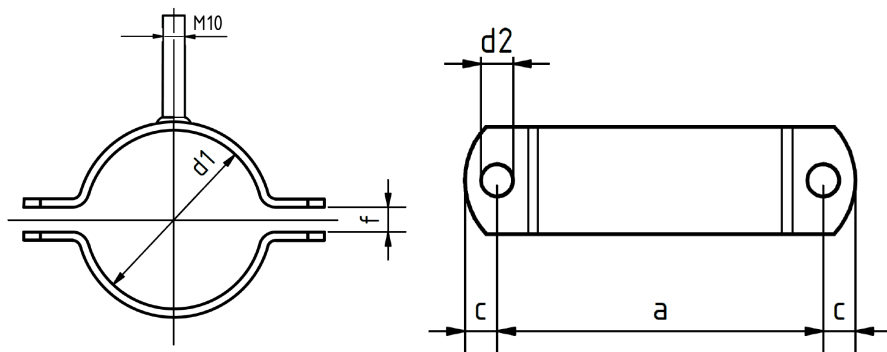

## ROHRSCHELLE MIT SCHAFT OHNE GUMMIEINLAGE

| SPANNBEREICH | Schaft | h  | a   | c  | d2 | f  | FLACHSTAHL | SCHRAUBEN |
|--------------|--------|----|-----|----|----|----|------------|-----------|
| 15 - 19 mm   | 8      | 55 | 37  | 9  | 9  | 7  | 30 x 3 mm  | M8 x 25   |
| 20 - 24 mm   | 8      |    | 42  |    |    |    |            |           |
| 25 - 30 mm   | 8      |    | 48  |    |    |    |            |           |
| 31 - 35 mm   | 10     |    | 53  |    |    |    |            |           |
| 36 - 41 mm   | 10     |    | 59  |    |    |    |            |           |
| 40 - 45 mm   | 10     |    | 63  |    |    |    |            |           |
| 48 - 53 mm   | 10     |    | 71  |    |    |    |            |           |
| 54 - 59 mm   | 12     |    | 77  |    |    |    |            |           |
| 60 - 65 mm   | 12     |    | 83  |    |    |    |            |           |
| 67 - 72 mm   | 12     |    | 100 |    |    |    |            |           |
| 76 - 81 mm   | 12     | 55 | 109 | 13 | 11 | 9  | 30 x 3 mm  | M10 x 30  |
| 82 - 87 mm   | 12     |    | 115 |    |    |    |            |           |
| 88 - 93 mm   | 12     |    | 121 |    |    |    |            |           |
| 94 - 98 mm   | 12     |    | 126 |    |    |    |            |           |
| 102 - 108 mm | 12     |    | 136 |    |    |    |            |           |
| 110 - 116 mm | 12     |    | 143 |    |    |    |            |           |
| 124 - 129 mm | 12     |    | 144 |    |    |    |            |           |
| 133 - 140 mm | 16     | 55 | 180 | 16 | 14 | 13 | 40 x 3 mm  | M12 x 35  |
| 143 - 150 mm | 16     |    | 189 |    |    |    |            |           |
| 149 - 155 mm | 16     |    | 193 |    |    |    |            |           |
| 159 - 165 mm | 16     |    | 204 |    |    |    |            |           |
| 167 - 173 mm | 16     |    | 210 |    |    |    |            |           |
| 176 - 182 mm | 16     |    | 225 |    |    |    |            |           |
| 188 - 194 mm | 16     |    | 239 |    |    |    |            |           |
| 199 - 205 mm | 16     |    | 247 |    |    |    |            |           |
| 230 - 236 mm | 16     | 55 | 260 | 18 | 18 | 14 | 40 x 4 mm  | M16 x 45  |
| 247 - 253 mm | 16     |    | 287 |    |    |    |            |           |
| 271 - 277 mm | 16     |    | 298 |    |    |    |            |           |
| 302 - 308 mm | 16     |    | 327 |    |    |    |            |           |
| 312 - 318 mm | 16     |    | 368 |    |    |    |            |           |
| 322 - 329 mm | 16     |    | 376 |    |    |    |            |           |
| 354 - 358 mm | 16     |    | 410 |    |    |    |            |           |
| 402 - 408 mm | 16     |    | 460 |    |    |    |            |           |
| 506 - 510 mm | 16     |    | 562 |    |    |    |            |           |

Bis Spannbereich 124 - 129 mm gestrahlt. Ab Spannbereich 131 - 137 mm gebeizt und passiviert